


M Series

MA500 Power Amplifier

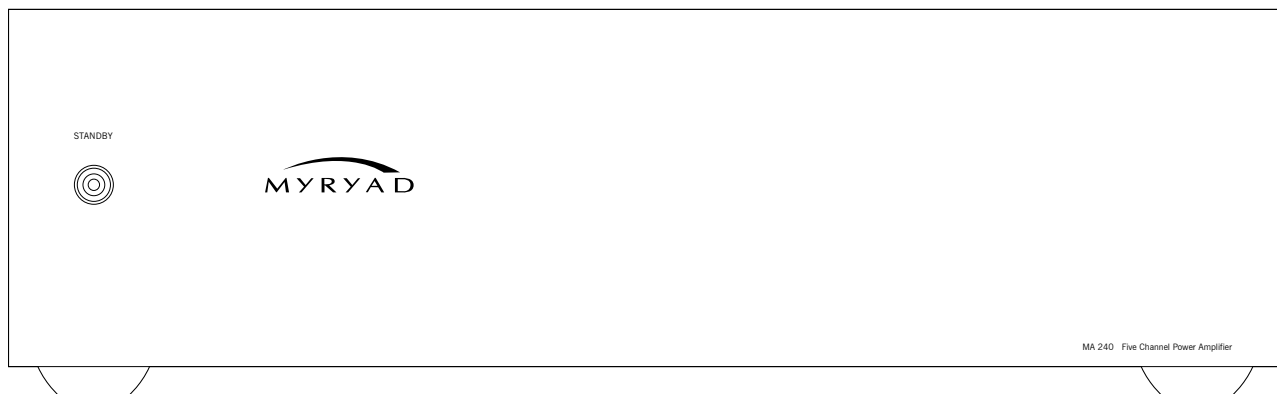

MA500 Power Amplifier Specifications

Five Channels driven

Continuous rated power output (< 0.05% THD, 20Hz - 20kHz): 8Ω:100W 4Ω:150W

IHF dynamic power: 8Ω:150W 4Ω:240W

One Channel driven

Maximum continuous power output (1% THD, 1kHz): 8Ω:160W 4Ω:280W

IHF dynamic power: 8Ω:180W 4Ω:320W

Signal/noise ratio (A-weighted, ref 100W): 110 dB

Input sensitivity (for 100W into 8Ω): 1.0V

Dimensions (w x h x d): 436 x 135 x 368mm

Weight (net): 20kg

Fascia: 6mm brushed aluminium in anodised natural silver or satin black finish

MYRYAD